



MPB-11T

LOW PROFILE TRANSIT MIX PLANT



SUPERIOR DESIGN

228 CU YD/HR PRODUCTION*
LOW MAINTENANCE COSTS
HIGH QUALITY CONCRETE
CONSISTENT BATCHES


RUGGED CONSTRUCTION

LONG SERVICE LIFE
UNITIZED CONSTRUCTION
STANDARD COMPONENTS
DEPENDABLE OPERATION

- The **ERIE MPB-11T** Brings Large Scale Batch Plant Performance to Large Scale Dry Batch Operations
- Production Rates Of 200 Cu Yds/Hr Can Be Realistically Achieved And Maintained Throughout The Day
- "Top-of-the-Line" Componentry Helps Assure Reliable, Consistent Operations From The Very First Day
- Ready Mix Producers Count On The **MPB-11T** For All Concrete Production Requirements

The **ERIE MPB-11T** brings a large plant performance to large metropolitan ready mix operations. Designed and built around a set of no compromise standards, the **MPB-11T** delivers on time for all daily ready mix orders. Superior performance and unparalleled staff support makes the **MPB-11T** the right plant to count on for demanding production schedules.

MPB-11T

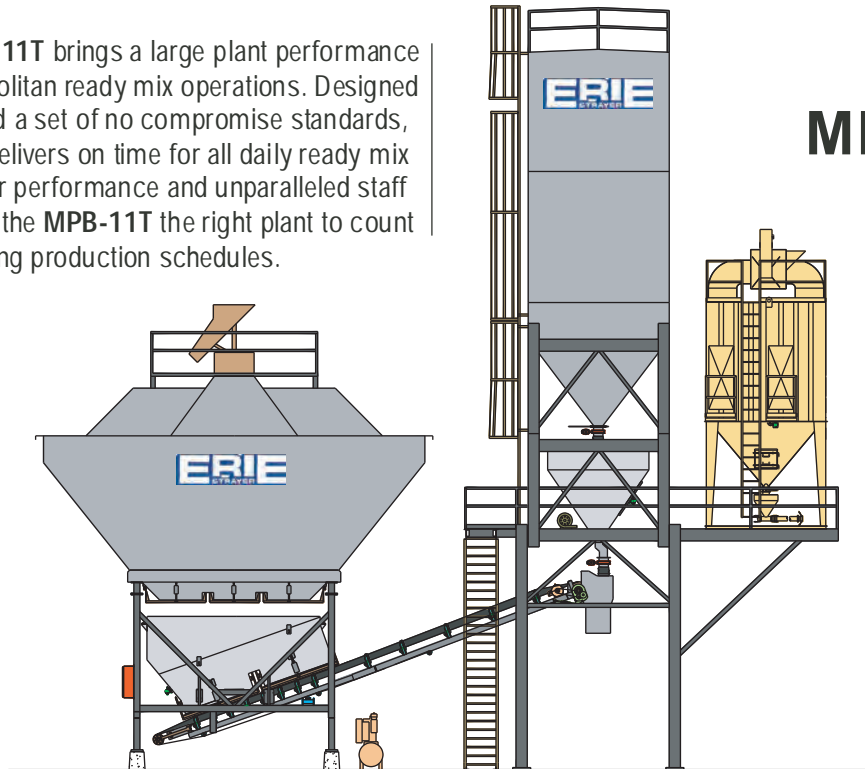

BASE CONFIGURATION**

- Unitized construction
- 20 cubic yard, 3 compartment aggregate bin
- 12 cubic yard aggregate batcher
- Load cell scale system
- Test weight hangers
- Silent rotary turbine vibrator
- 30" batch transfer conveyor
- 20 HP shaft mount reducer
- 1070 bbl single compartment cement bin
- 4" air loading pipe
- 12 cubic yard cement batcher
- Load cell scale system
- Test weight hangers
- Silent rotary turbine vibrator
- Truck charging chute
- 3" Badger electronic water meter
- 10 HP Ingersoll-Rand air compressor
- Plant motor control panel
- Factory wiring, piping and plumbing
- Manual control panel

OPTIONAL FEATURES**

- 50, 80, 100, 150, 215 and 290 cu yd aggregate bins
- 4 - 8 aggregate bin compartments
- AR-400 steel and **Erithane** bin and batcher liners
- 36" batch transfer conveyor
- 1500 bbl, 2050 bbl, 2350 bbl and 3000 bbl cement bin
- Additional 4" and 5" air loading pipes
- Anti-overfill valves
- 2 - 8 compartments
- Electromagnetic flowmeters and water batchers
- 15 - 30 HP air compressors
- 4 ½ - 7 HP aeration blowers
- Plant maintenance platforms
- Access ladders, stairways and walkways
- ERIE **Scout** computer control system
- Hydronix **Hydro-Probe II** microwave moisture system
- C&W dust collection systems
- Bin charging conveyors
- Aggregate ground hoppers
- Automatic aggregate handling panel

** Consult factory for complete listing
* Estimated production based on industry standards;
consult factory for details

